

# KR AUDIO ELECTRONICS HI VACUUM TUBE

## KR T-1610

### General data

Filament specifications:	DC/AC Voltage	5 V
	DC/AC Current	3,8 A

Amplification Factor	3,7
----------------------	-----

---


#### Maximum

DC Plate Voltage	600 V
Dissipation	150 W
DC Plate Current	240 mA

---

DC Plate Voltage	400 V
DC Plate Current	160 mA
Grid Voltage	-83 V
Plate Resistance	370 ohm
Transconductance	9,9 mA/V

### CONNECTION OF THE VALVE BASE KR T-1610

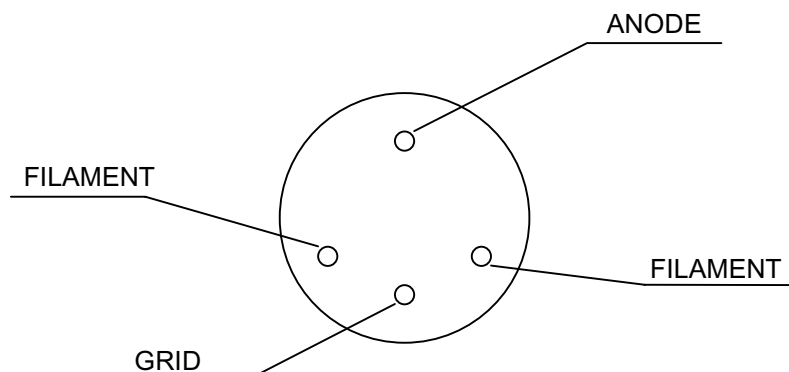

### VIEW FROM BELOW

**KR AUDIO USA, Harwil Group**  
*Exclusive USA Distributor*  
8390 E. Via De Ventura  
F110-194  
Scottsdale, Arizona 85258  
1-888-593-8488 x121  
[www.kraudiousa.com](http://www.kraudiousa.com)

# Plate characteristics KR T-1610

